
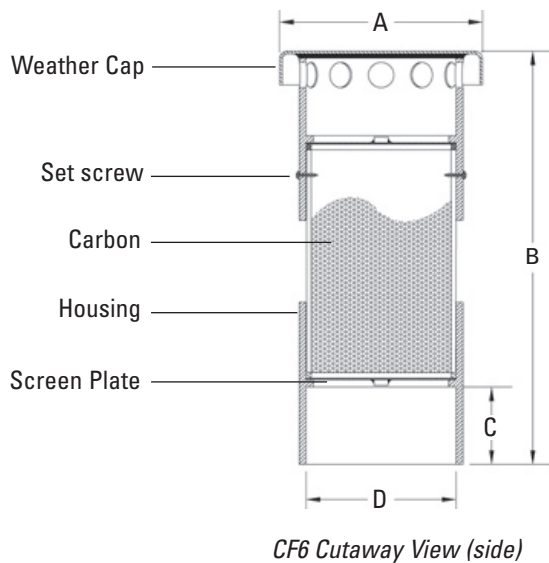


Carbon Filters

Applications

Oreco Carbon Filters reduce the odor of sewer gases in passive airflow venting applications.

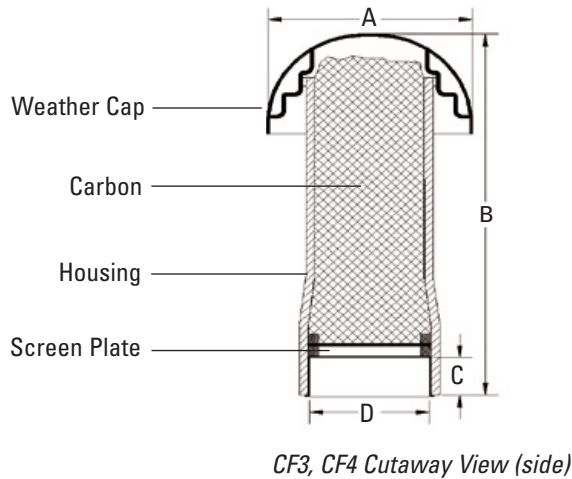


General

The Oreco Carbon Filter attaches to vent pipes with a slip fit. The weather cap is removable to allow replacement of the carbon package. Carbon replacement frequency will be based on the volume and strength of gases being scrubbed by the filter. Carbon recharge packages, adapter bushings, and custom sizes are available.

Standard Models

CF3, CF4, CF6

Nomenclature

CF  Filter diameter:
3 = 3"
4 = 4"
6 = 6"
Carbon filter



Materials of Construction

Weather Cap:	ABS (CF3, CF4)	Fiberglass (CF6)
Carbon:	Granular activated impregnated carbon	
Housing:	UV-resistant PVC	
Screen Plate:	Polyethylene	

Specifications

Dimensions	CF3	CF4	CF6
A	5-1/2 in. (139 mm)	5-1/2 in. (139 mm)	9 in. (229 mm)
B	10 in. (254 mm)	12-1/2 in. (318 mm)	18-5/16 in. (465 mm)
C	1-1/4 in. (31.8 mm)	1-1/2 in. (38.1 mm)	3-7/16 in. (87.3 mm)
D	3-1/2 in. (88.9 mm)*	4-1/2 in. (114 mm)*	6-5/8 in. (168 mm)*
Carbon weight:	0.9 lb (0.41 kg)	1.6 lb (0.73 kg)	6 lb (2.73 kg)
H ₂ S capacity:	.14 grams/cc	.14 grams/cc	.14 grams/cc

*Fits nominal 3", 4", and 6" vent pipe. Fittings are available to adapt to other vent pipe sizes.